

TTRT-03A S2

HIGHEST ACCURACY & LOWEST COST



Transformers Testing

TTRT-03A S2

3 hours of operation through batteries

LTC Contact

130 types of transformers

Turns-ratios from 0,8 to 15000

RS232C and two USB ports

Self-adjusts before each measurement

Calculate of error percentage

Built-in thermal-printer

amperis

www.amperis.com

 AMPERIS PRODUCTS S.L
Agricultura,34
27003, Lugo, Spain

 **Contact**

+T [+34] 982 20 99 20 | F [+34] 982 20 99 11
info@amperis.com | www.amperis.com

The TTRT-03A S2 is a battery-powered, microprocessor-based, automatic, three phase, transformer turns-ratio tester. The TTRT-03A S2 determines the transformer turns-ratio using the IEEE C57.12.90 measurement method. The TTRT-03A S2 generates and outputs an excitation test voltage to the transformer's three primary windings. The induced secondary voltage is sensed and the transformer turns ratio is calculated. The TTRT-03A S2 can measure turns-ratios from 0.8 to 15,000. The transformer turns-ratio, excitation current, and phase-angle readings are displayed on the unit's LCD screen. The built-in transformer type detection feature allows the TTRT-03A S2 to detect and test 130 transformer types defined by ANSI, CEI/IEC and Australian standards.

The TTRT-03A S2 can be used as a standalone unit or can be computer-controlled. It can be operated locally using its alpha-numeric keypad and rotary switch. Information is displayed on a back-lit LCD screen (128 x 64 pixels) that is viewable in both bright sunlight and low-light levels. Test reports can be printed in the field on the unit's built-in 4.5-inch wide thermal printer. The TTRT03A S2 can store up to 112 test records and 128 test plans in Flash EEPROM. Test records or test plans can be stored or transferred to and from a PC via the available interfaces (RS-232C port, USB port, USB Flash drive port).

Transformer Test Voltages

The TTRT-03A S2 generates excitation test voltages internally. Three test voltages (8 Vac, 40 Vac, 100 Vac) allow the TTRT-03A S2 to test CT's and PT's, as well as power transformers.

Auto-Detect Transformer Configuration

The TTRT-03A S2 can automatically detect 130 different transformer types defined by ANSI, CEI/IEC, and Australian standards.

Internal Test Record Storage

Up to 112 test records can be stored in the TTRT-03A S2's Flash EEPROM memory. Each test record may contain up to 99 turns-ratio, excitation current, phase angle and nameplate voltage readings. Test records can be recalled locally or transferred to a PC via the available interfaces (RS-232C port, USB port, USB Flash drive port).

Built-in Thermal Printer

The TTRT-03A S2 features a convenient built-in 4.5-inch wide thermal printer that can be used to print test results.

Transformer Test Plans

The TTRT-03A S2 can store up to 128 transformer test-plans in its Flash EEPROM. A test plan is comprised of the transformer nameplate voltages for each tap setting. The calculated turns-ratio based on the nameplate voltages is compared with the measured turns-ratio to de-

rive the percentage error and Pass/Fail results. By using a test plan, a transformer can be quickly tested and turns-ratio Pass/Fail reports can be reviewed. Test plans can be created with the PC software and can be transferred to the TTRT-03A S2 via the available interfaces (RS-232C port, USB port, USB Flash drive port).

User Interface

The TTRT-03A S2 features a back-lit LCD screen (128 x 64 pixels) that is viewable in both bright sunlight and low-light levels. The test results screen displays the transformer turns-ratio, excitation current, phase angle, and percentage error. The unit is controlled via a rugged, 16-key, membrane keypad and a digital rotary switch.

USB Flash Drive Interface

A built-in USB Flash drive interface provides a convenient method for transferring test plans and test records to or from a USB Flash drive. The user can store up to 999 transformer test plans and test records on a USB Flash drive, and the supplied PC software can be used to view the test records.

Computer Interface

In computer-controlled mode, the unit can be controlled via the RS-232C or USB interface using the supplied PC software (Transformer Turns-Ratio Analyzer application provided with each TTRT-03A S2). This Windows®-based application can be used to run tests and to store


test results on a PC. Test results can also be exported to Excel, PDF, and XML formats for further analysis.

Power Sources


The TTRT-03A S2 can be continuously powered for three hours from its built-in rechargeable lead acid batteries or from a single-phase 100-240 Vac 50/60 Hz power source. A built-in charger allows the batteries to be charged while in use.

Transformer Load Tap Changer Control

Voltage regulator or LTC tap positions can be changed remotely using the unit's built-in transformer load tap changer. This feature eliminates the need to manually raise or lower tap positions from the transformer control panel.

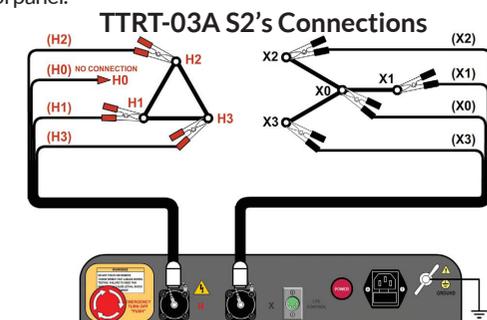

TTRT-03A S2's Controls

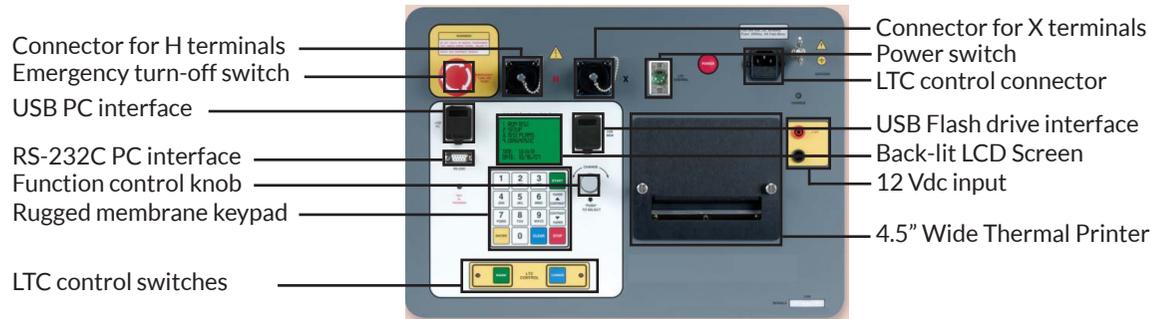

Thermal Printer Report

RECORD NUMBER 1			
TRANSFORMER TEST RESULTS			
DATE: 03-28-12	TIME: 14:29:53		
COMPANY:			
STATION:			
CIRCUIT:			
TYPE:			
TEST VOLTAGE = 40 V, 60 Hz			
TYPE: Dgn 1			
H TAP: _____	H VOLTAGE: 12,000		
X TAP: _____	H VOLTAGE: 200		
CALCULATED RATIOS: 99.999			
PHASE	PHASE	PHASE	DIFF
A = 99.999	B = 99.999	C = 99.999	D = 0.000
B = 99.999	C = 99.999	D = 99.999	E = 0.000
C = 99.999	D = 99.999	E = 99.999	F = 0.000

TTRT-03A S2's Specifications

Type	Portable, lightweight, automatic, 3-phase transformer turns-ratio meter
Physical specifications	20"W x 7½"H x 15½"D (50 cm x 19 cm x 39.6 cm); Weight: 27 lbs (12 kg)
Input power	100 - 240 Vac, 50/60 Hz
Batteries	Two lead acid batteries (12V, 2Ah) provide up to 3 hours of operation
Measurement method	ANSI/IEEE C57.12.90
Ratio measuring range	0.8 - 15,000
Turns ratio accuracy	0.8 - 1999: ±0.1%, 2,000 - 3,999: ±0.25%, 4,000 - 15,000: ±1% @ 8 Vac 0.8 - 1999: ±0.1%, 2,000 - 3,999: ±0.20%, 4,000 - 15,000: ±1% @ 40 Vac 0.8 - 1999: ±0.1%, 2,000 - 3,999: ±0.15%, 4,000 - 15,000: ±1% @ 100 Vac
Test voltages	8 Vac @ 350 mA, 40 Vac @ 70 mA, 100 Vac @ 20 mA
Excitation current reading range	0 - 2 Amperes; Accuracy: ±1mA, ±2% of reading (±1 mA)
Phase angle measure	0 - 360 degrees; Accuracy: ±0.2 degrees (±1 digit)
Display	Back-lit LCD screen (128 x 64 pixels) viewable in bright sunlight and low-light levels
Printer	Built-in 4.5-inch wide thermal printer
Computer interface	One RS-232C port, one USB port
External data storage	One USB Flash drive interface port; Up to 999 transformer test records can be stored on a USB Flash drive (not included)
Pc software	Windows®-based Transformer Turns-Ratio Analyzer application is included
Internal test record storage	Can store 112 transformer test records internally. Each record holds the test record header and up to 99 readings.
Internal test plan storage	Can store 128 transformer test plans internally. Test plans can be transferred to the unit from the PC via the RS-232C/USB port or via the USB Flash drive interface
Load tap changer contact	240 Vac, 1 Amps
Safety	Designed to meet UL 61010A-1 and CAN/CSA C22.2 No. 1010.1-92 standards
Environment	Operating: -10°C to +50°C (+15°F to +122°F); Storage: -30°C to +70°C (-22°F to +158°F)
Humidity	90% RH @ 40°C (104°F) non-condensing
Altitude	2,000 m (6,562 ft) to full safety specifications
Cables	One 15-foot single-phase set, one 15-foot 3-phase set, one 25-foot extension set, one safety ground, one RS-232C, one USB, cable bag
Optional accessories	Transportation case
Warranty	1 year on parts and labor

NOTE: the above specifications are valid at nominal voltage and ambient temperature of +25°C (+77°F). Specifications are subject to change without notice.