

# QAUTO-OHM 200 S3

HIGHEST ACCURACY & LOWEST COST



## Micro-Ohmmeter

# QAUTO-OHM 200 S3

Resistance values from 1 microohm to 5 ohms

DC test current from 1A to 200A

“Auto Test” mode

Dual Ground option

Store 128 records of 64 readings

amperis

[www.amperis.com](http://www.amperis.com)

 AMPERIS PRODUCTS S.L  
Agricultura,34  
27003, Lugo, Spain


 Contact

+T [+34] 982 20 99 20 | F [+34] 982 20 99 11  
[info@amperis.com](mailto:info@amperis.com) | [www.amperis.com](http://www.amperis.com)

The QAUTO-OHM 200 S3 is Amperis' fourth generation, microprocessor-based, true DC micro-ohmmeter. It is designed for testing EHV circuit-breaker contact resistances, bushing contact joints, welding joints, or for any low-resistance measuring application. This high current and very light-weight (16.8 lbs/ 7.6 Kg) micro-ohmmeter is designed to meet the IEEE C57.09-1999 (5.15) requirement for testing circuit breaker contact resistance. The QAUTO-OHM 200 S3 can accurately measure resistance values from 1 microhm to 5 ohms. A 0.1 micro-ohm resolution is possible with current greater than 5A. The QAUTO-OHM 200 S3 applies a selectable true DC test current from 1A to 200A to the resistance load to be tested.

The QAUTO-OHM 200 S3 controls the test current's rise and fall rates. The test current rise and fall rate can be selected from 5 seconds to 30 seconds. An "Auto Test" mode is also available and can be initiated simply by applying the sense cables' leads across the two points of interest in the current path. This feature is very convenient when measuring a sequence of several resistance values in a circuit breaker contact. The QAUTO-OHM 200 S3 can also compare test results against preset limits and determine if a test passed or failed, and a "Pass" or "Fail" flag is displayed accordingly. Since a true DC current (with controlled rise/fall time) is passed through the circuit breaker contact, no magnetic transient is induced into the breaker's current transformers. This feature greatly reduces the risk of inductively tripping a breaker control (bus differential relay).

QAUTO-OHM 200 S3 Connections

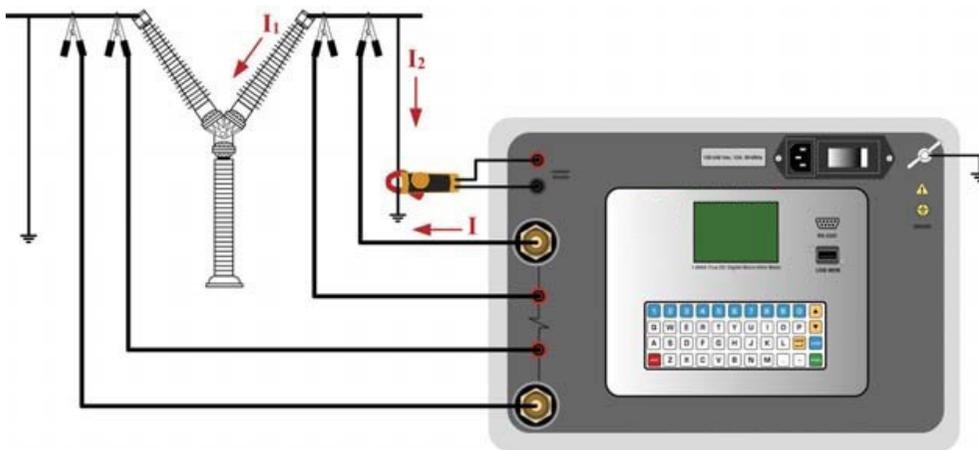

#### Computer Interface

Windows®-based analysis software is provided with each unit and can be used to retrieve test records (from the unit's memory via the RS-232C port or from a USB Flash drive), analyze test results, and print test results on a desktop printer. Test records can also be exported to PDF, Excel, and XML formats for further analysis.

#### Dual Ground Option

With the Dual Ground option, the QAUTO-OHM 200 S3 can also measure the circuit breaker contact resistance with both sides of the breaker bushing being grounded. When a test current is applied to a circuit breaker with both sides grounded, some of the test current flows through the safety ground cables. Using an external current sensor, the QAUTO-OHM 200 S3 measures and eliminates this current from the total test current. The Auto-Ohm then calculates the actual resistance value of the circuit breaker.

#### Test Record Storage

The QAUTO-OHM 200 S3 can store 128 records of 64 readings internally, and up to 999 test records on an external USB Flash drive. Test header information (Company, Substation, circuit breaker ID's) can also be entered using the 44-key keypad and is stored with each test record.

#### User Interface

The QAUTO-OHM 200 S3 features a back-lit (128 x 64 pixels) LCD screen that is viewable in both direct sunlight and low-light levels. The resistance readings are displayed on the LCD screen in micro-ohms or milliohms. The unit is operated via a convenient 44-key "QWERTY" keypad on the front panel.

#### Included Cables

The QAUTO-OHM 200 S3 is furnished with a 30-ft test cable set. A 15-ft test cable set is also available as an option. Test cables are terminated with heavy duty welding type clamps. The test current and voltage sense cables are isolated and fastened to the clamp jaws. This feature allows for a simple connection to the circuit breaker bushing. An optional voltage sense cable and probe can be used to measure resistance in small access locations. Optional heavy duty, welding type C-clamps are also available allowing the user to connect the test leads to a wide variety of bushing sizes, bus-bars, or large conductors.

## QAUTO-OHM 200 S3 Controls



## QAUTO-OHM 200 S3 Specifications

<b>Type</b>	Portable micro-ohmmeter
<b>Physical specifications</b>	17"W x 7"H x 13" D (43.2 cm x 17.8 cm x 33.0 cm); Weight: 16.8 lbs (7.6 kg)
<b>Input power</b>	100 - 240 Vac, 50/60 Hz
<b>Resistance reading range</b>	1 micro-ohm at 200A to 5 ohms at 1A
<b>Accuracy</b>	1A to 4.99A: 1% ±10 micro-ohms 5A to 9.99A: 1% ±2 micro-ohms 10A to 200A: 1% ±1 micro-ohm
<b>Test current range</b>	1 Ampere to 200 Amperes (selectable in 1A steps); Thermally protected DC power supply
<b>Display</b>	Back-lit LCD screen (128 x 64 pixels); viewable in bright sunlight and low light conditions
<b>Keypad</b>	Rugged, 44-key "QWERTY" membrane keypad
<b>Internal test record storage</b>	128 test records. Each record can contain up to 64 readings
<b>External test record storage</b>	Up to 999 test records on external USB flash drive.
<b>Computer interface</b>	One RS-232C PC interface, one USB flash drive interface
<b>Pc software</b>	Windows®-based analysis software included with purchase price
<b>Safety</b>	Designed to meet IEC 61010 (1995), UL 61010-a, and CAS-C22.2 standards
<b>Environment</b>	Operating: -10°C to +50°C (+15°F to +122°F); Storage: -30°C to +70°C (-22°F to +158°F)
<b>Humidity</b>	90% RH @ 40°C (104°F) non-condensing
<b>Altitude</b>	2,000 m (6,562 ft) to full safety specifications
<b>Cables</b>	30 ft (9.1 m), #1 AWG test cables, power cord, ground cable
<b>Optional accessories</b>	Shipping case, 15 ft test cables, c-clamp set, hand spike set, dual ground option
<b>Warranty</b>	1 year on parts and labor

NOTE: the above specifications are valid at nominal voltage and ambient temperature of +25°C (+77°F). Specifications are subject to change without notice.